


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.45V I:0.0294A P:6.3555W PF:0.9374 Freq:49.99Hz Lamp Flux:825x1 lm		
NAME: RADO MINI - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:
SPEC.:CW, NICHIA	DIM.: Sq.105 x 38	SERIAL No.:4527
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2776	Imax (cd)	225.4	S/MH (C0/180)	1.37
NOMINAL POWER (W)	6	LOR (%)	32.4	S/MH (C90/270)	0.60
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	266.96	η UP, DN (C0-180)	0.0, 31.3
NOMINAL FLUX (lm)	825	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 1.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	32.4	CIBSE SHR MAX	1.00

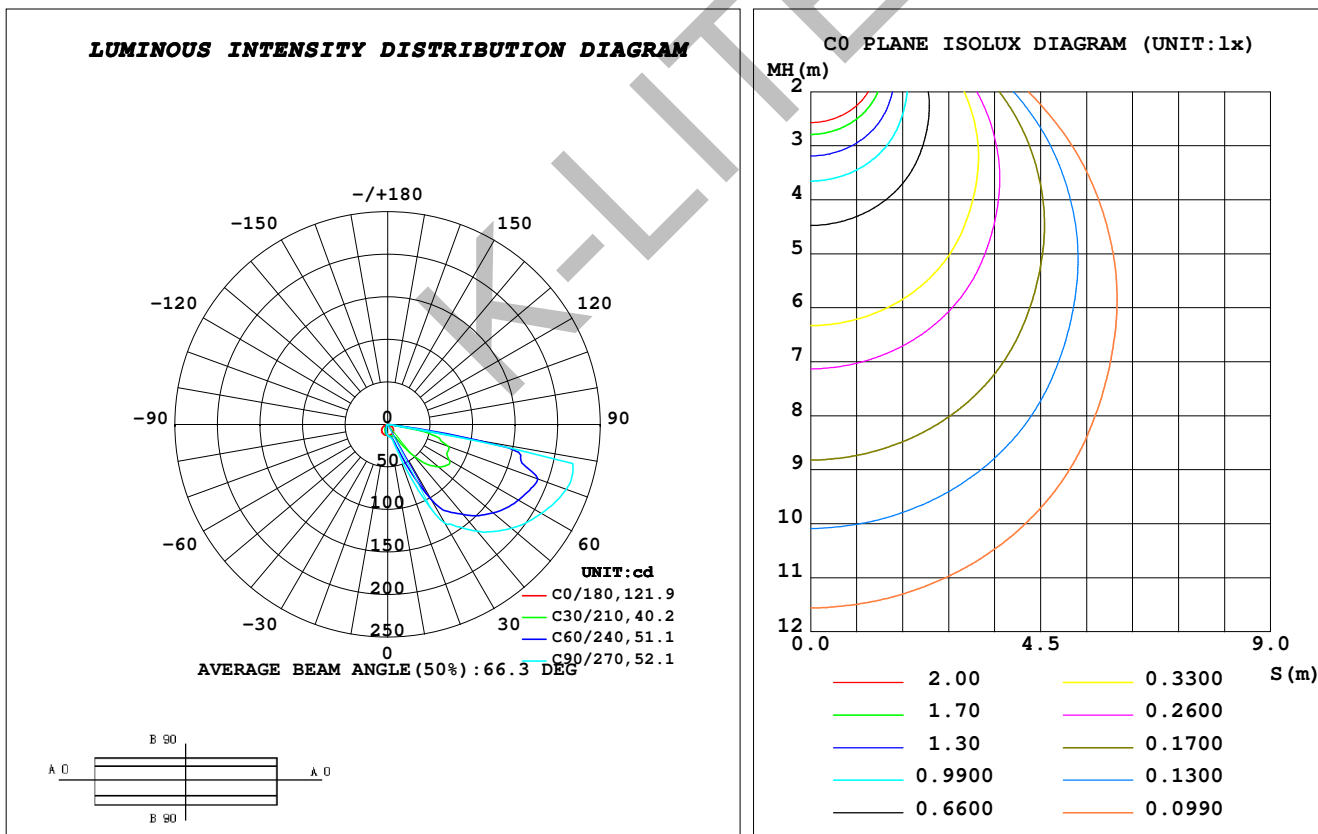

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 05 May 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**