


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.50V I:0.0273A P:6.1470W PF:0.9777 Freq:49.99Hz Lamp Flux:871.02x1 lm		
NAME: SUDO MINI - GRID FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 130 x 87 x 76	SERIAL No.:4861
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2746	Imax (cd)	178.3	S/MH (C0/180)	1.27
NOMINAL POWER (W)	6	LOR (%)	21.0	S/MH (C90/270)	0.45
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	182.53	η UP, DN (C0-180)	0.0, 17.1
NOMINAL FLUX (lm)	871.02	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 3.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	230	η down (%)	21.0	CIBSE SHR MAX	0.75

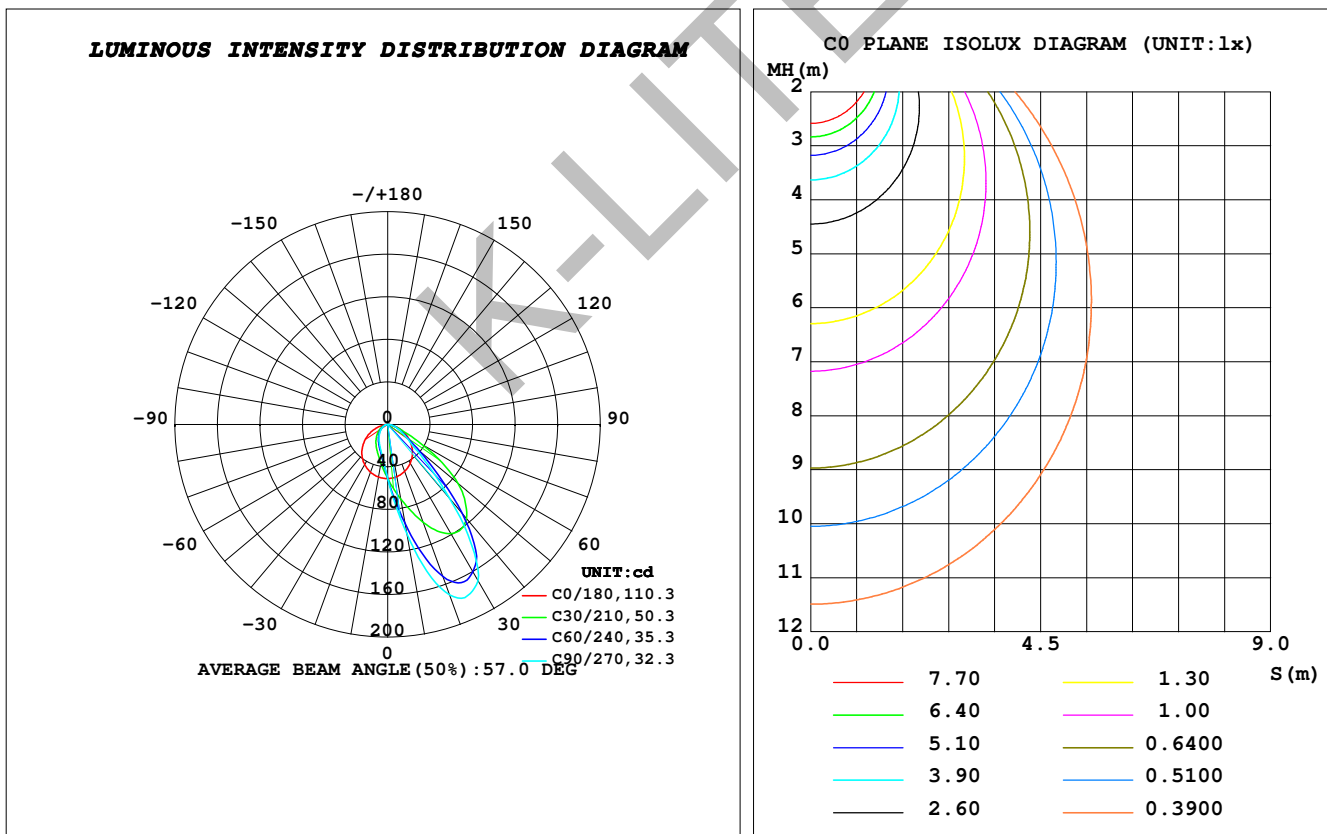

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 01 September 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: