


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.44V I:0.0130A P:2.8589W PF:0.9554 Freq:49.99Hz Lamp Flux:223.92x1 lm		
NAME: SUDO MINI - ARC FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 76 x 87 x 130	SERIAL No.:4872
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-2768	Imax (cd)	71.24	S/MH (C0/180)	1.23
NOMINAL POWER (W)	3	LOR (%)	42.0	S/MH (C90/270)	1.19
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	94.140	η UP, DN (C0-180)	0.0, 29.8
NOMINAL FLUX (lm)	223.92	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 12.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	42.0	CIBSE SHR MAX	1.35

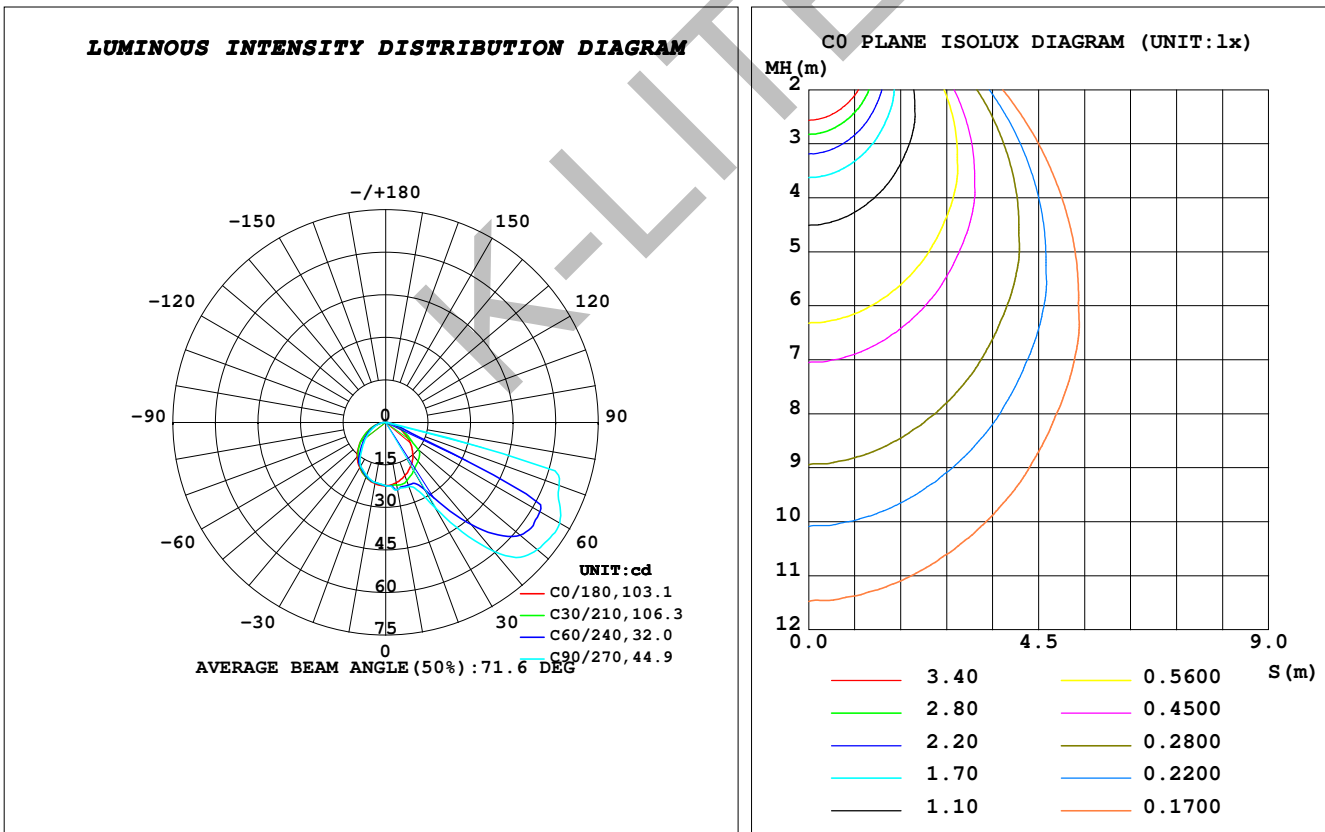

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 03 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: