


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.39V I:0.1365A P:12.938W PF:0.4113 Freq:49.99Hz Lamp Flux:1355.9x1 lm		
NAME: FLEXIBLE LED STRIP	TYPE: LINEAR LIGHTING	WEIGHT:
SPEC.: WW	DIM.: 1M LENGTH	SERIAL No.: 1387
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-7289	Imax (cd)	251.3	S/MH (C0/180)	1.34
NOMINAL POWER (W)	12	LOR (%)	61.3	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	830.69	η UP, DN (C0-180)	0.0, 32.0
NOMINAL FLUX (lm)	1355.9	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 29.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	230	η down (%)	61.3	CIBSE SHR MAX	1.50

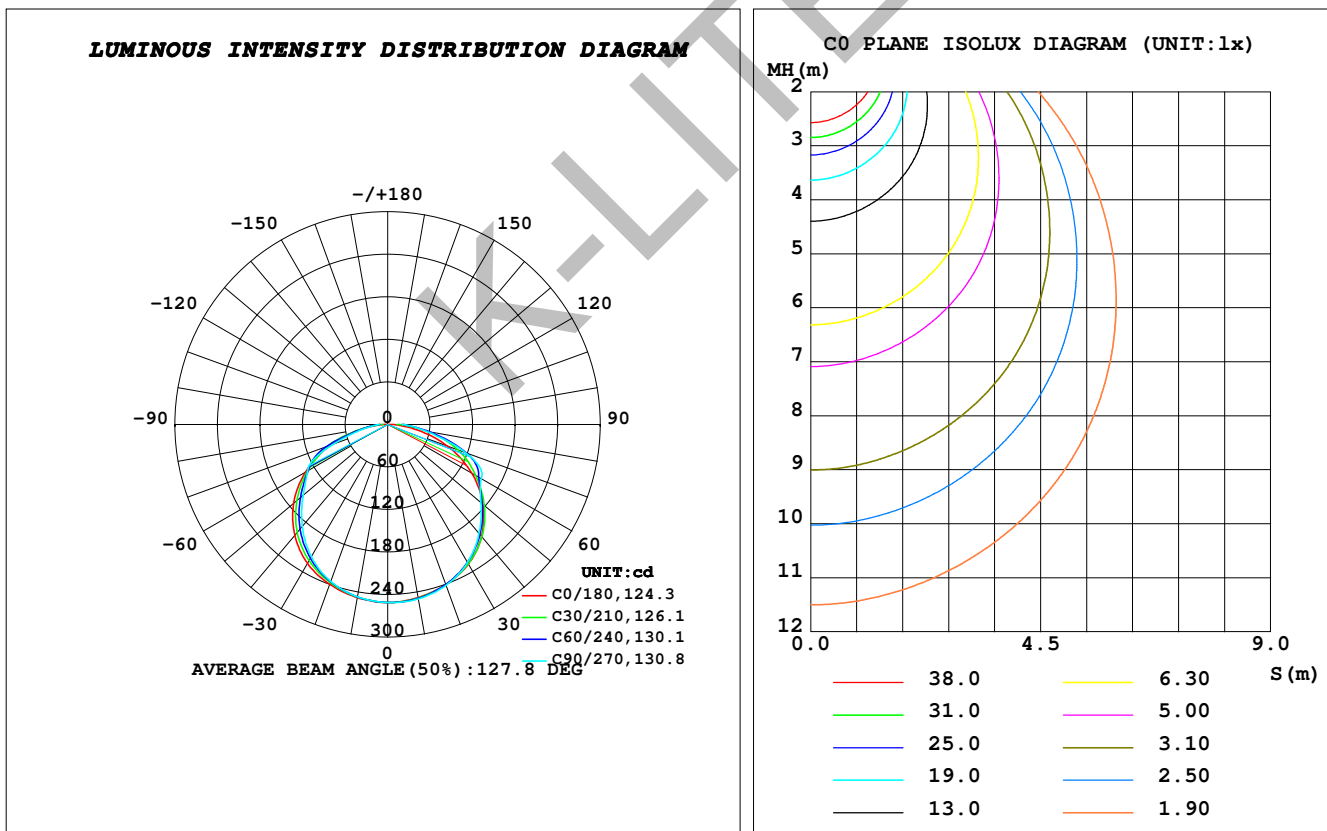

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 09 June 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: